


LINEAR POWER AMPLIFIER	LPA-AH0C-040AB-3400M-3800M-48-00
P2970	
FEATURES ◆ 3400-3800MHz ◆ Gain : 30 dB ◆ 40W P-2dB, Class AB ◆ CW or pulse operation ◆ +48V / 2.4 A @ 40W CW ◆ Protection against reverse voltage, over current and over temperature ◆ Fast On/Off switching ◆ RoHS compliant	AH0C PACKAGE  APPLICATIONS ◆ Instrumentation

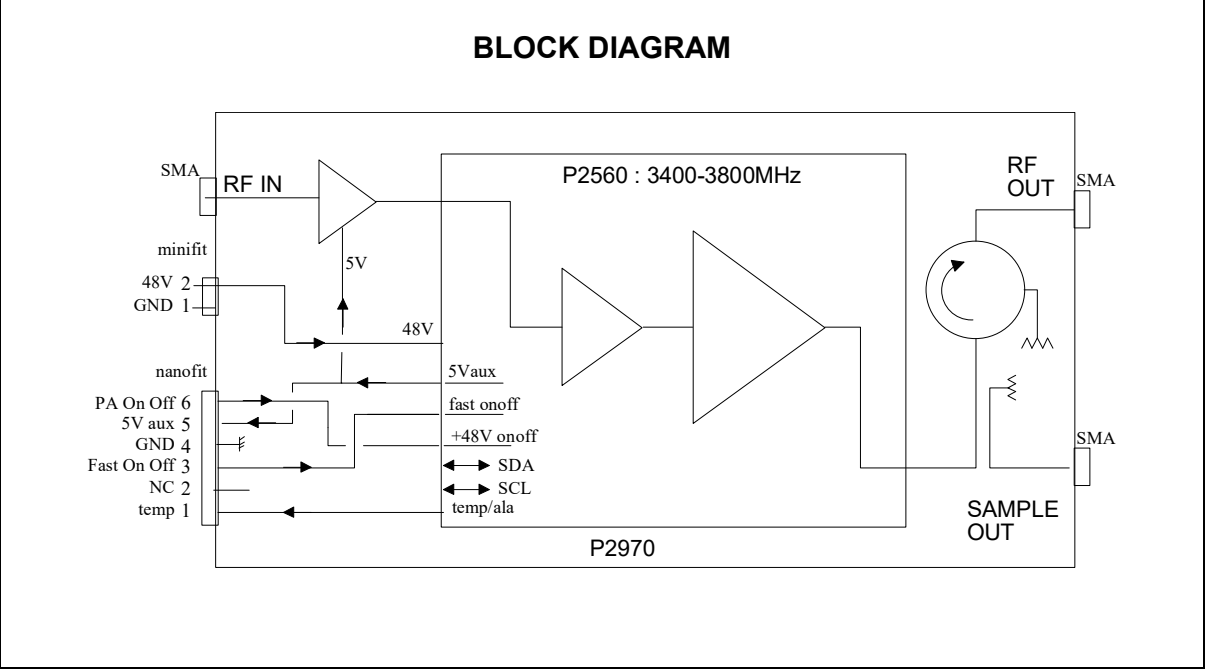

Specifications and information are subject to change without notice

Electrical characteristics: 50 ohms; +48V; -25°C to +80°C (1)

Ref	parameter	conditions	note	min	typ	max	units
1	Bandwidth			3400		3800	MHz
3	Small signal Gain	3600 MHz; 50°C		30	33		dB
	Ss Gain variation vs temp	-25°C to +80°C	2		5		dB
4	Gain at 40W	3600 MHz; 50°C		29	31		dB
5	Gain variation vs frequency	3400 MHz - 3800 MHz				2	dBpp
6	Sample output	Relative to main output			-30		dBc
7	Input return loss	50 ohms				-15	dB
8	Output return loss	50 ohms				-15	dB
9	Multi tones intermodulation	10 tones 1MHz spacing, 50W peak,	3		-27	-25	dBc
10	Peak envelope power	2 tones , IMD3 = -27 dBc			50		W
11	Current consumption	48V, idle			0.2		A
12	Current Consumption	48V, 40W CW 3600MHz			2.4		A
13	Fast on/off control	TX ON			0	0.3	V
14	Fast on/off control	TX OFF		2.5	3		V
15	signal rise time	3V to 0V negative edge	4			1	μs
16	Rise time delay		4			3	μs
17	Signal fall time	0V to 3V positive edge	4			1	μs
18	Fall time delay		4			3	μs
19	Gain TX OFF	Tx=3V			-50		dB

1. Unless otherwise specified
2. Hot Spot Temperature
3. Peaked phases
4. Low impedance drive

Maximum ratings

Ref	parameter	conditions	note	min	Nom	max	units
1	Operating temperature	Flange temperature		-40		+90	°C
2	Supply voltage			30	48	50	V
3	Input power	CW				+6	dBm
4	Reverse power					46	dBm
5	Max load VSWR	@ 40W output				∞:1	-

Protections


Ref	parameter	description	remarks
1	Overvoltage	Shut down if supply > 50 V	
2	Under voltage	Shut down if supply < 30 V	
3	Reverse voltage	No current drawn	
4	Overcurrent	Shut down if current > 2.8 A	Lower power and PA On/Off to recover
5	Temperature	Shut down if temp > 80°C	Auto recover at 70°C

Monitoring & control

Ref	characteristic	description	remarks
1	PA On/Off	48V switching (used for reset)	+3V=ON internal pull up
2	Fast On/Off	Gain switching	+3V=ON internal pull up
3	Temperature	Analog output	-40°C to +100°C (TMP20)
4	Alarm		<0.1V for alarm

Specifications and information are subject to change without notice

Part numbering:

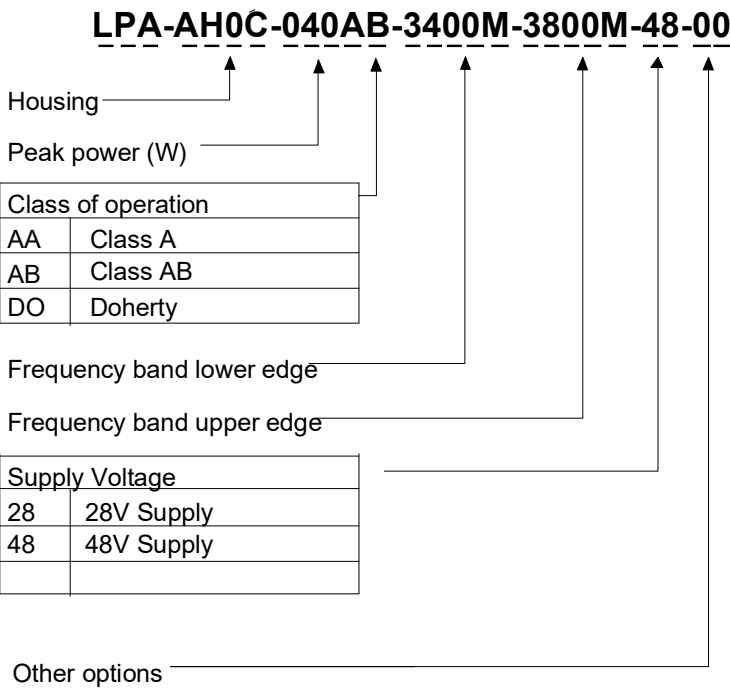

Support material

Ref	Characteristic	Description	Remarks
1	T280	Analog control board	Supplied by 5V aux from amplifier
2			
3			

Related products


Ref	Characteristic	Description	Remarks
1			
2			
3			

Communication DC Connector Molex NanoFit 105405-1206

Pin description			PINOUT
Pin 1 : Analog temperature	Pin 4 : Gnd	Mate with 105308-1206	
Pin 2 : NC	Pin 5 : 5V aux		
Pin 3 : Fast on/off	Pin 6 : Power On/Off		


Specifications and information are subject to change without notice

Power Supply DC Connector Molex MiniFit Jr 39-30-1020

Pin description			PINOUT
Pin 2 : Supply +48V		Mate with 39-01-2020 and inserts 39-00-0038	
Pin 1 : Gnd			


Mechanical characteristics

Ref	characteristic	description	remarks
1	Housing dimensions	135mm x 64mm x 21mm	
2	Housing finish	Surtec 650	
3	Mounting	4 M4 screws	
4	Input/output RF connectors	SMA	
5	DC supply connector	Molex 39-30-1020	Male type
6	DC controls connector	Molex 105405-1206	Male type
7	Weight	400 grams	

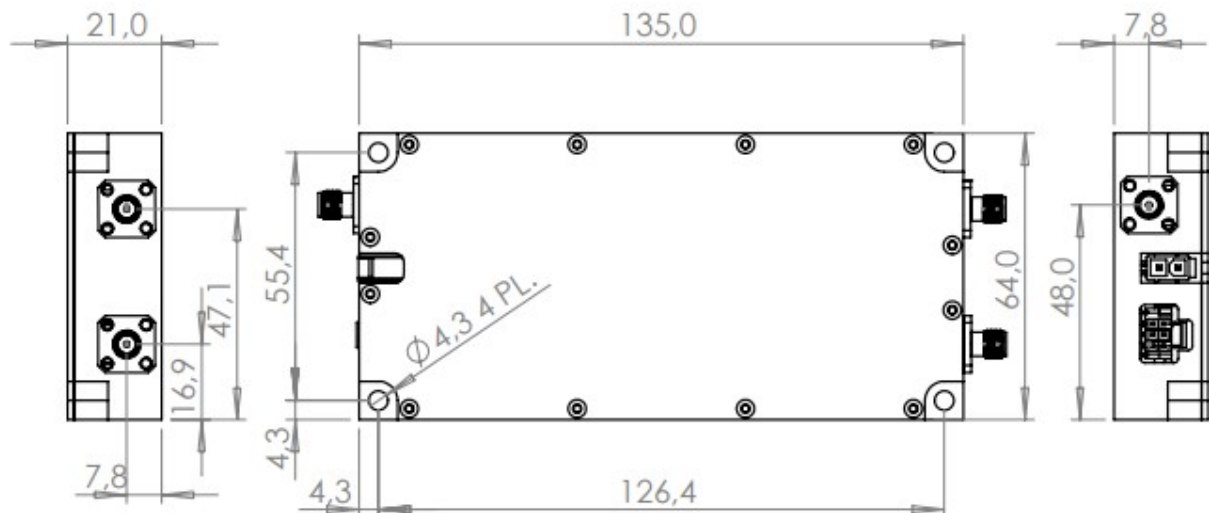
Package outline:

Specifications and information are subject to change without notice

TYPICAL PERFORMANCE

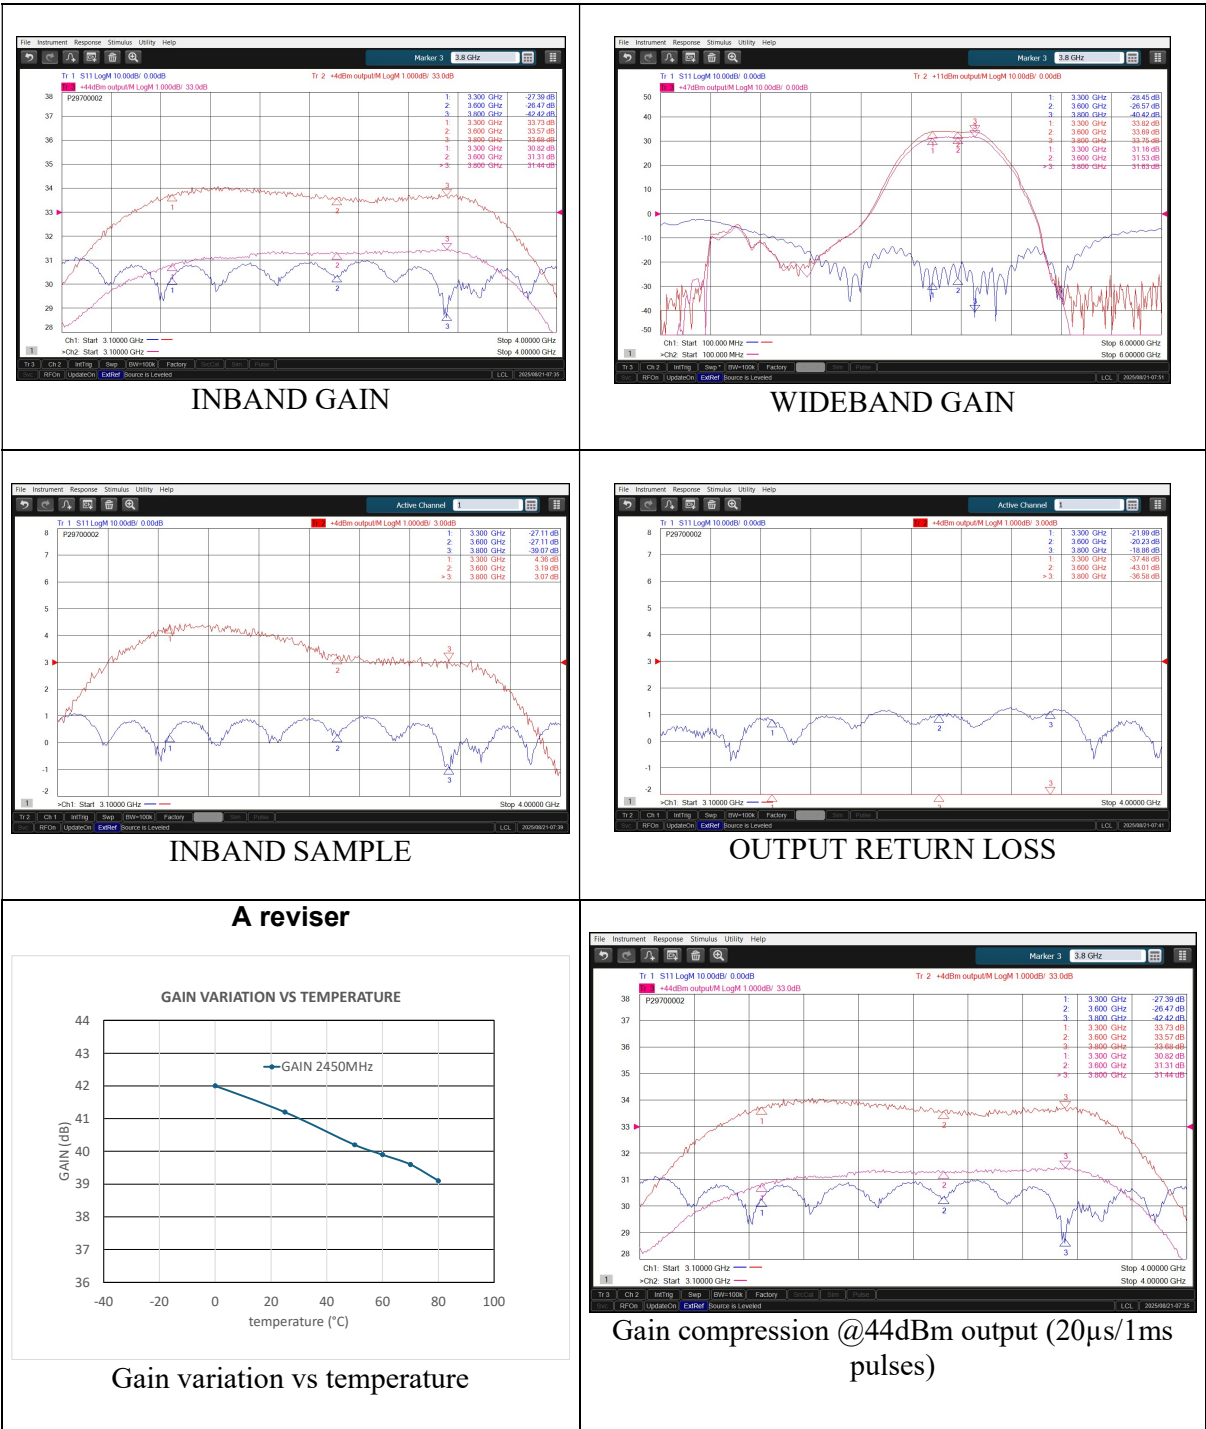

TYPICAL PERFORMANCE (continued)

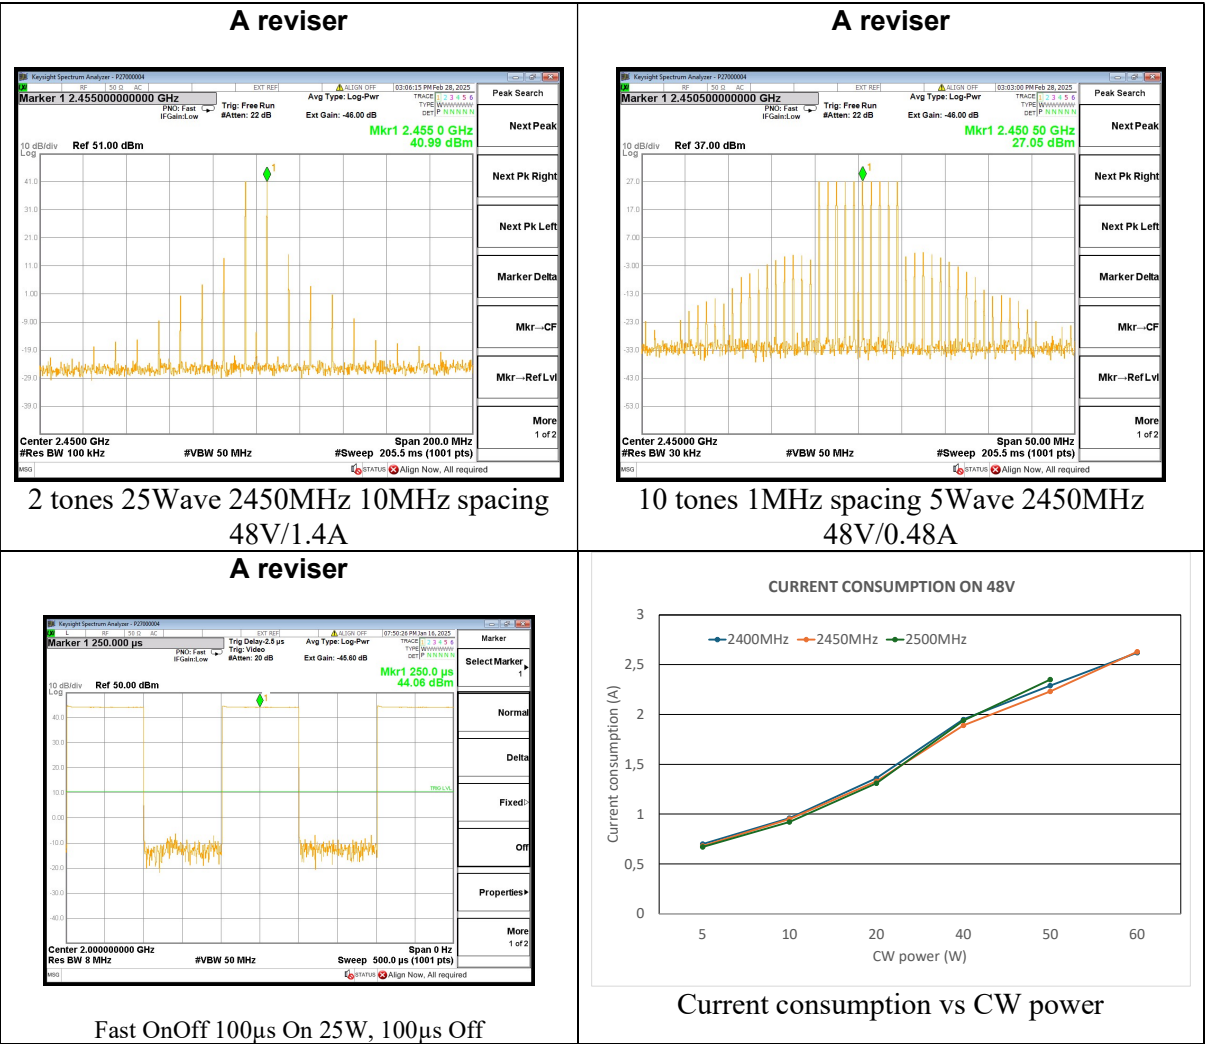

Specifications and information are subject to change without notice